


TUNGSTEN SMART-HEAT™ GAS

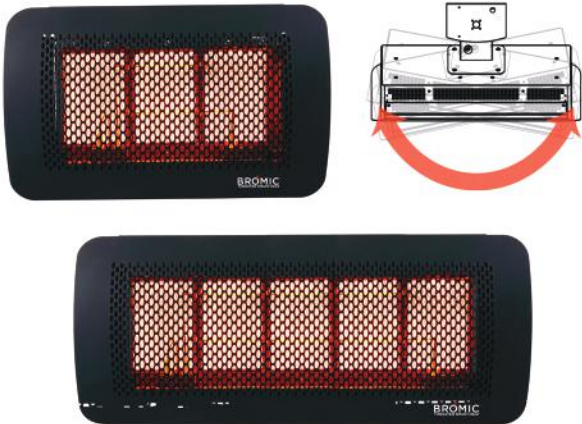


A designed, cost-conscious product blending aesthetics and function

A designed, cost-conscious product range that does not sacrifice aesthetics for function.

The patented direct ignition system, never before seen on an outdoor gas radiant heater, ensures a reliable start and effective operation, even in winds of up to 8mph.

Easy pivot arm provides greater positioning versatility and heat coverage.

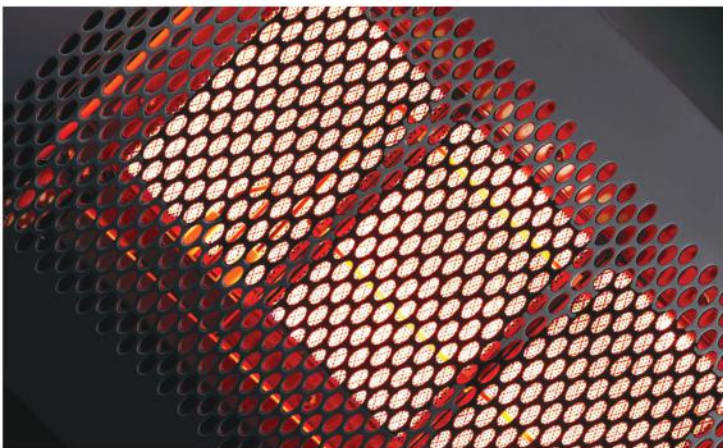

FEATURES

High-Performance Mesh Screen

The Tungsten's unique screen scientifically manipulates infrared energy to maximize performance while achieving a superior spread of heat

Ceramic Efficiency

Slow-release ceramic burners efficiently combust gas to fuel the most environmentally friendly gas-fired heating method available

Strong, Directional Heat

Robust radiant heat output with an easy pivot arm bracket for greater positioning versatility

Patented Direct Ignition

Automated direct ignition eliminates the need for a pilot, resulting in instantaneous ignition

Ultra-Durable Design

Stainless steel construction ensures reliable heating for years to come

Ease Of Use

Smart system compatibility and automated re-ignition allows users to simply set and forget

Exceptional Wind Resistance

Patented screen and ionization probe technology enables remarkable wind resistance, functioning reliably in winds of up to 12km/h or 8mph

Versatile Mounting


Reclaim valuable floor space through fixed heating with a range of ceiling and wall mounting options

Wireless Control Capabilities


Genuine wireless control accessories allow seamless integration of remote heater control



DIMENSIONS

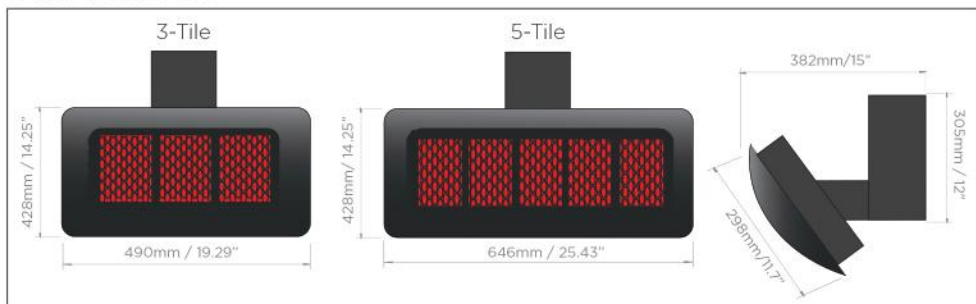

HEAT AREA

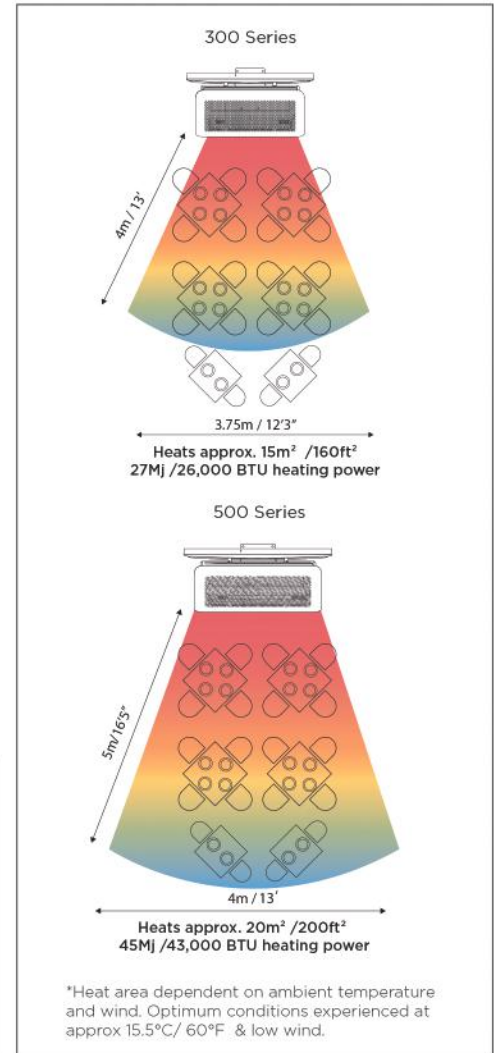

SPECIFICATIONS

Model		300	500
Part no.	LPG ¹	BH0210002-1	BH0210004-1
	Natural Gas ¹	BH0210001-1	BH0210003-1
Heat Deflector part no.		BH3030011	BH3030012
Ceiling Pole		5 pole lengths to suit ceiling heights of 10.5', 11.2', 11.8', 12.5' and 13'	
Heat Output (on LPG and NG)		26,000BTU	43,000BTU
Approximate area heated (feet ²)		up to 160ft ²	up to 200ft ²
Gas connection		1/2" NPT Female	1/2" NPT Female
Electrical connection		110 Volt, 3-pin insulated plug	
Dimension (WxDxH)		19.29" x 14.09" x 14.25"	25.43" x 14.09" x 14.25"
Min. distance to combustible materials (without heat deflector) ²		Sides: 3' / 915mm	
		Above (to ceiling): 3' / 915mm	
Min. distance to combustible materials (with heat deflector)		Above (to ceiling): 14" / 350mm	
Mounting height requirement to ground ³		8' / 2438mm	
Weight (lb)		33lbs	40lbs

¹Must only be installed by a licensed technician. Must complete "Pre-Installation Checklist" before installing. ²The temperature will not exceed 65°C/149°F above the ambient temperature. Please consult material manufacturer for temperature ratings. ³8' / 2438mm or maybe lower depending on local regulations

MINIMUM INSTALLATION CLEARANCES

