

# PLATINUM

SMART-HEAT™ ELECTRIC II



Colours

Black

White

## Comfort without compromise...

The Platinum Smart-Heat™ Electric excels in efficiency, packing profound performance into a sleek package to suit high-end, style-centric settings. Designed specifically with low-clearance, semi-enclosed and aesthetically-focused spaces in mind, this heater minimizes light emission to blend seamlessly into rooflines with the aid of recess kits or stylishly mount to a number of other surfaces.



## FEATURES

### Tinted Glass-Ceramic Screen

The Platinum's signature screen spreads comfort evenly across an area while minimizing light emission

### Wafer-Thin Design

Wall, ceiling and flush-mounting options allow subtle placement of this compact heater practically anywhere!

### Subtle Aesthetics

Elegantly understated to create comfort while blending into the environment

### Precise Directional Heating

Accurately alter coverage through simple bracket adjustment

### Ultra-Durable Design

Stainless steel construction ensures reliable heating for years to come

### Tight Space Specialist

Minimal vertical clearance requirements and a multitude of mounting options offers versatility to a variety of enclosed outdoor areas



### Ease Of Use

Single switch activation and smart control compatibility creates set-and-forget simplicity



### Wireless Control Capabilities

Genuine wireless control accessories allow seamless integration of remote heating output adjustment


## BRACKET TYPES

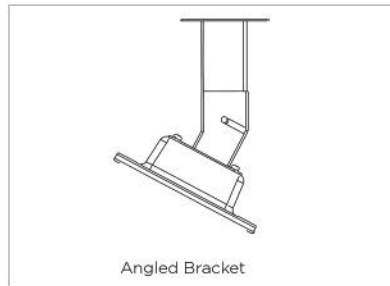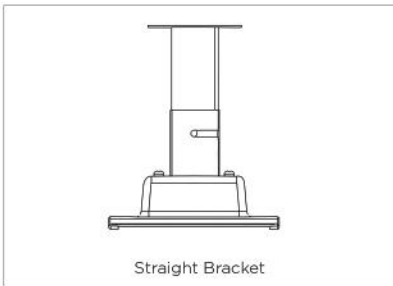

## HEATING AREAS:

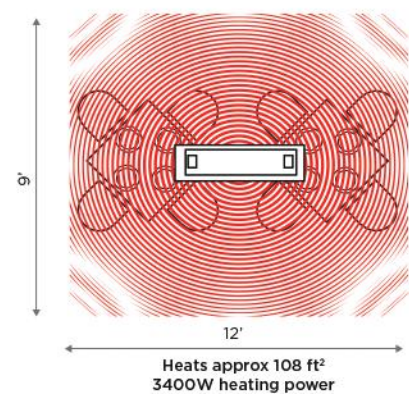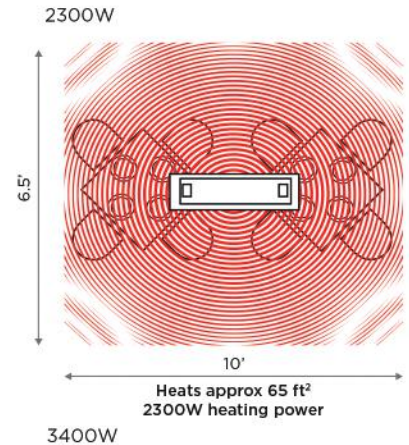

\*Heat area dependent on ambient temperature and wind. Optimum conditions experienced at approx 15.5°C/ 60°F & in a low wind covered environment.

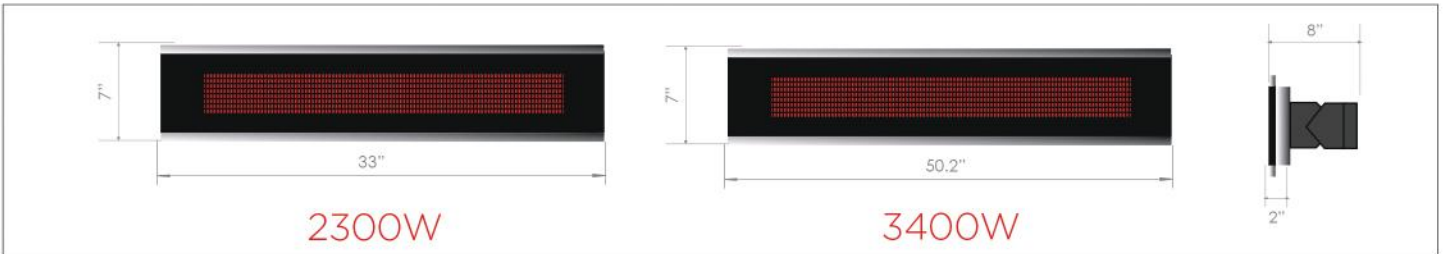

## SPECIFICATIONS

Model		Platinum Smart-Heat™ Electric II	
Part No.	Black	BH0320003	BH0320005
	White	BH0320007	BH0320008
Heat Output (Watts)		2300W	3400W
Approximate area heated (ft <sup>2</sup> )		65 ft <sup>2</sup>	108 ft <sup>2</sup>
Electrical connection		220-240V - A.C. - 50/60Hz - 9.6A	220-240V - A.C. - 50/60Hz - 14.2A
Dimension (WxDxH)		33" x 7" x 2"	50.2" x 7" x 2"
Min. distance to combustible materials <sup>2</sup>		Side: 10"	Side: 18"
Mounting height requirement to ground <sup>3</sup>		Wall Mount: 71", Ceiling Mount: 94"	
Weight (lbs)		16.5 lbs	22 lbs
Finish		Brushed stainless steel AISI 304	
Approval		Intertek: 5001799	

<sup>1</sup>Must only be installed by a licensed technician. Must complete "Pre-Installation Checklist" before installing. <sup>2</sup>The temperature will not exceed 65°C above the ambient temperature at specified distances. Please consult material manufacturer for temperature ratings and suitability. Bromic Heating takes no responsibility for material compliance. <sup>3</sup>Installation must be performed in accordance with AS5601 installation code (or relevant standard) and must comply with any additional jurisdictional requirements. Bromic takes no responsibility for incorrect or non-compliant installations

## MINIMUM INSTALLATION CLEARANCES

