
TUNGSTEN
SMART-HEAT®ELECTRIC SELECT




KEY FEATURES

- **Flexible Heat Output Options:**
  Available in 2000W, 3000W, 4000W, and 6000W models to suit a range of outdoor environments
- **Efficient Radiant Performance:**
  Soft-glow infrared elements and a spectral reflector deliver effective, targeted radiant heat with reduced glare
- **Refined, Low-Profile Design:**
  Slim form factor integrates seamlessly into modern architectural settings
- **Enhanced Design Flexibility:**
  Available in multiple finishes with a standard Diamond Pattern fascia and optional fascia designs sold separately
- **Low-Clearance Recessing:**
  Compatible with a low-clearance recess kit for a cleaner, more integrated ceiling installation
- **Durable, Weather-Resistant:**
  High-temperature, corrosion-resistant coating with an IPX5 rating for outdoor use
- **Directional & Versatile Mounting:**
  Adjustable mounting hardware supports precise heat placement across wall, ceiling, and angled mounting applications

COLOR OPTIONS



Black




White



Graphite


DIMENSIONS

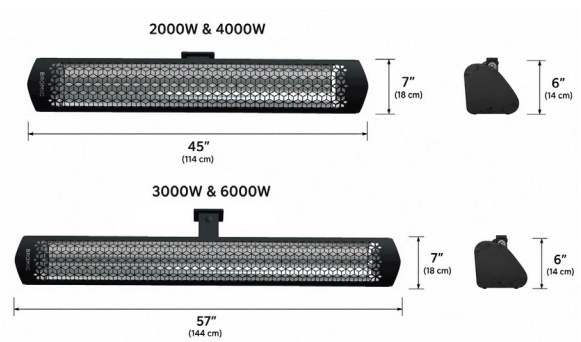

MOUNTING OPTIONS



Wall Mounted



Ceiling Mounted



Flush Mounted

Discover *Tungsten Smart-Heat® Electric Select*

Learn more at **bromic.com**

BROMIC HEATING

TUNGSTEN
SMART-HEAT®ELECTRIC SELECT


SPECIFICATIONS

PRODUCT NUMBER	WATTAGE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
BLACK BH0440212	2000 W	65 ft2	13 lbs.	240 V / 8.3 A	WALL 72" CEILING 96"	INTERTEK ETL / cETL 4005951	IPX5	Affinity Dimmer Affinity On/Off Manual Wall Switch
BLACK BH0440312 BH0440322 BH0440332	3000 W	100 ft2	15 lbs.	240 V / 12.5 A 208 V / 14.4 A 277V / 10.8 A				
BLACK | **WHITE** | **GRAPHITE** BH0440412 | BH0440413 | BH0440414 BH0440422 | BH0440423 | BH0440424 BH0440432 | BH0440433 | BH0440434	4000 W	130 ft2	13 lbs.	240 V / 16.6 A 208 V / 19.2 A 277 V / 14.4 A				
BLACK | **WHITE** | **GRAPHITE** BH0440612 | BH0440613 | BH0440614 BH0440622 | BH0440623 | BH0440624 BH0440632 | BH0440633 | BH0440634	6000 W	160 ft2	15 lbs.	240 V / 25 A 208 V / 28.8 A 277 V / 21.7 A				


CLEARANCES

INCLUDED MOUNT


2000W & 3000W

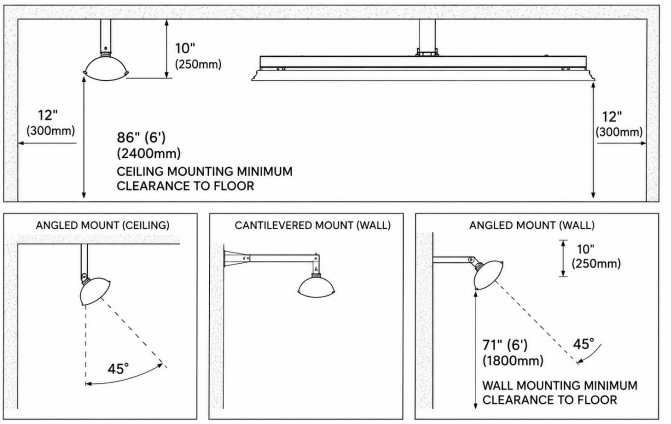


4000W & 6000W

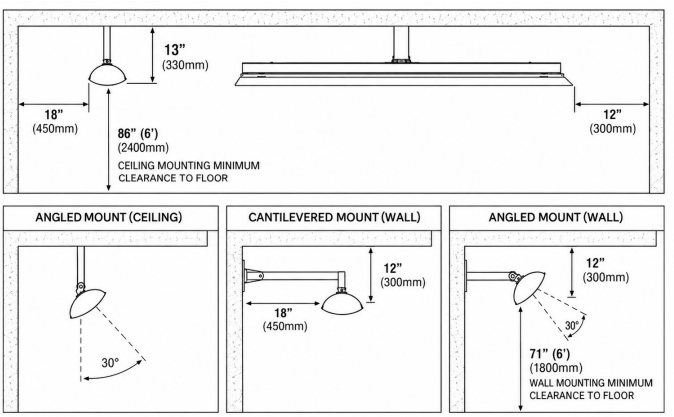

CANTILEVERED MOUNTING ARM

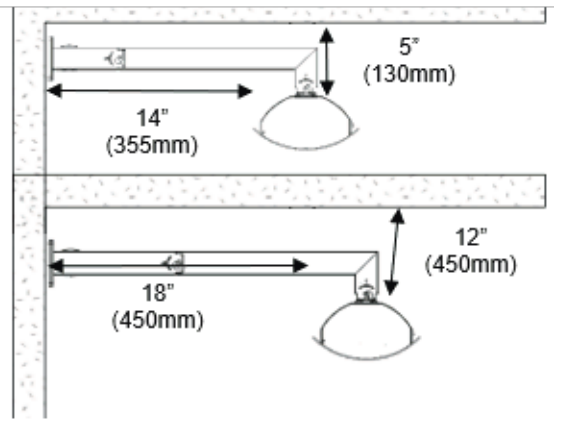

PITCHED CEILING MOUNTING



12 Adjustable Pitch Positions
6 Left | 6 Right

LOW CLEARANCE RECESSING KIT

